



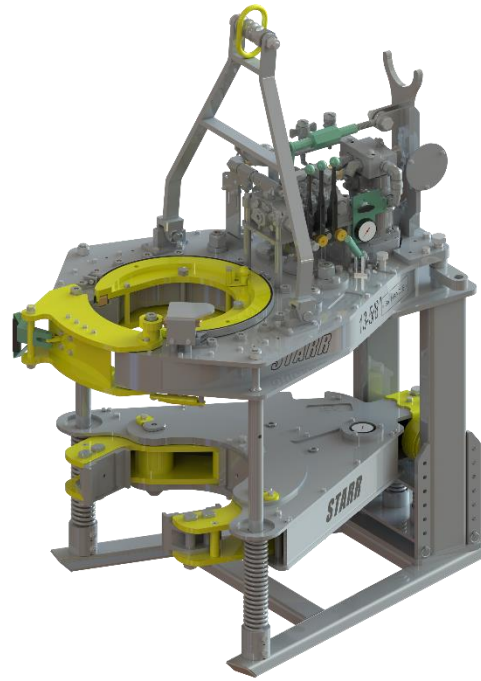

# 13-5/8" SPECIFICATIONS

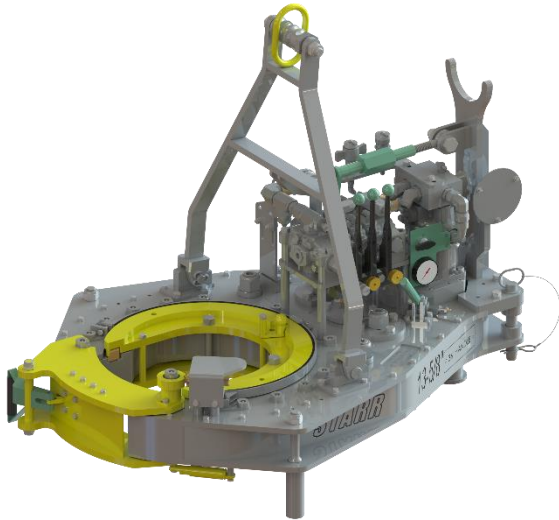

TYPICAL TESTED PERFORMANCE TORQUE (109.35.03.33.XX)					TYPICAL TESTED PERFORMANCE RPM (109.35.03.33.XX)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb					
1000	14000	7000	2800	1400	10	1	2	6	11
2000	28000	14000	5600	2800	20	3	5	13	26
2250	31500	15750	6300	3150	40	6	11	28	56
2500	35000	17500	7000	3500	60	9	17	43	86
<p><i>Disclaimer: Technical Values are +/- 5% of Listed Values</i>  <i>Speed 1 = Low (Hydraulic) / Low (Mechanical)</i>  <i>Speed 2 = High / Low</i>  <i>Speed 3 = Low / High</i>  <i>Speed 4 = High / High</i></p>									

13-5/8" Tong	Stand Alone	With Backup
Capacity	5" - 13-5/8" (Tong)	7" - 15" (Backup)
Width	43" (109.2 cm)	46" (116.8 cm)
Length	57.6" (146.3 cm)	61.6" (156.5 cm)
Height	47.5" (120.6 cm)	76.4" (190 cm)
Weight (lb)	1690 (767 kg)	3,200 (1452 kg)
Hyd. System Rated Pressure	2500 psi	
Rated Torque	35,000 ft-lbs (47453 Nm)	
Handle Length	36" (91.4 cm)	



Starr Power Tongs, LLC.  
 2801 Youngsville Hwy  
 Youngsville, LA 70592  
 United States of America  
 Phone: +1-337-330-2631