



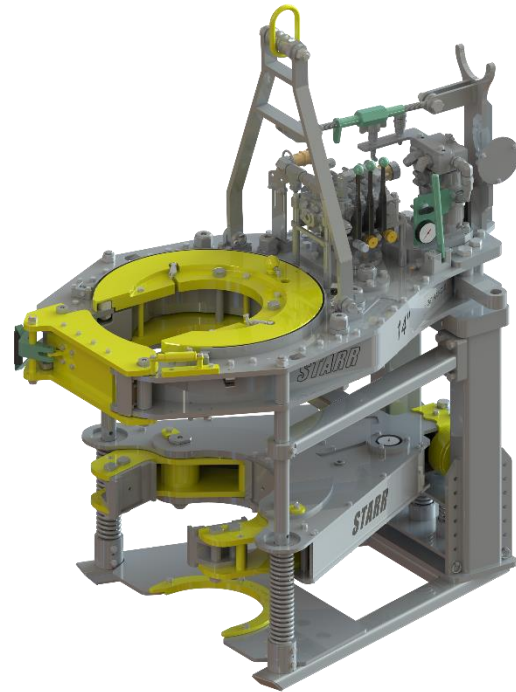

# 14" 50K SPECIFICATIONS

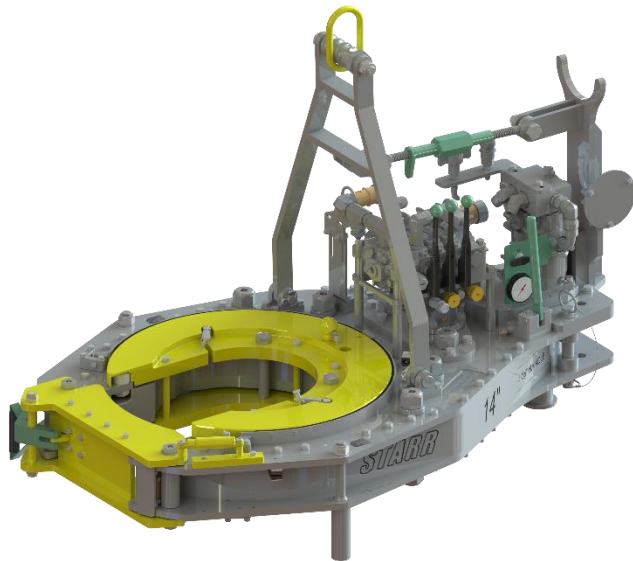

TYPICAL TESTED PERFORMANCE TORQUE (112.50.03.33.XX)					TYPICAL TESTED PERFORMANCE RPM (112.50.03.33.XX)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb	10	1	2	5	11
1000	20600	10300	3600	1800	20	2	4	11	23
2000	41200	20600	7200	3600	40	4	8	23	47
2250	46400	23200	8100	4000	60	6	12	35	70
2500	51500	25700	9000	4500	<i>Disclaimer: Technical Values are +/- 5% of Listed Values</i> <i>Speed 1 = Low (Hydraulic) / Low (Mechanical)</i> <i>Speed 2 = High / Low</i> <i>Speed 3 = Low / High</i> <i>Speed 4 = High / High</i>				

14" 50K Tong	Stand Alone	With Backup
Capacity	6-5/8" - 14" (Tong)	7" - 15" (Backup)
Width	41.5" (105.4 cm)	46" (116.8 cm)
Length	65.3" (165.9 cm)	65.3" (165.9 cm)
Height	46.9" (119.1 cm)	80.1" (203.5 cm)
Weight (lb)	2360 (1070 kg)	3860 (1751 kg)
Hyd. System Rated Pressure	2500 psi	
Rated Torque	50,000 ft-lbs (67790 Nm)	
Handle Length	36" (91.4 cm)	



Starr Power Tongs, LLC.  
 2801 Youngsville Hwy  
 Youngsville, LA 70592  
 United States of America  
 Phone: +1-337-330-2631