




5-1/2" SPECIFICATIONS

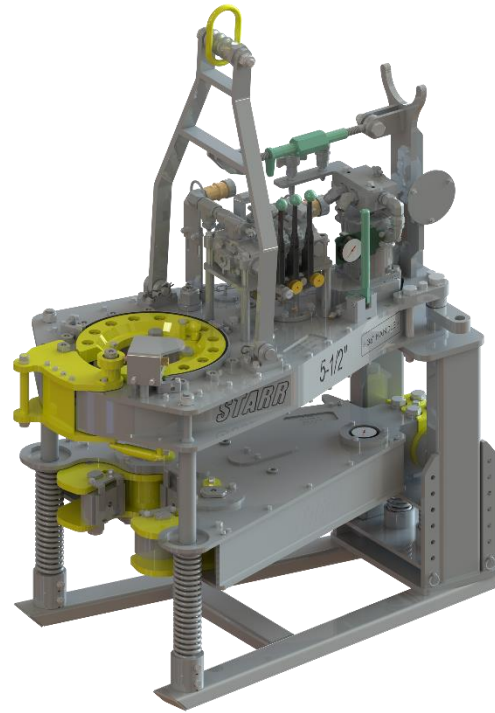

TYPICAL TESTED PERFORMANCE TORQUE (44.25.01.33.XX)					TYPICAL TESTED PERFORMANCE RPM (44.25.01.33.XX)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb	10	2	N/A	11	N/A
1000	8400	N/A	1700	N/A	20	4	N/A	23	N/A
2000	16900	N/A	3400	N/A	40	9	N/A	46	N/A
2250	19000	N/A	3900	N/A	60	13	N/A	69	N/A
2500	21100	N/A	4300	N/A	<p><i>Disclaimer: Technical Values are +/- 5% of Listed Values</i> <i>Speed 1 = Low (Hydraulic) / Low (Mechanical)</i> <i>Speed 2 = High / Low</i> <i>Speed 3 = Low / High</i> <i>Speed 4 = High / High</i></p>				

5-1/2" Tong	Stand Alone	With Backup
Capacity	2-3/8" - 5-1/2" (Tong)	2-3/8" - 6-1/4" (Backup)
Width	31" (78.7 cm)	33.7" (88.6 cm)
Length	52.9" (134.4 cm)	55" (139.7 cm)
Height	47.8" (121.4 cm)	69.3" (176 cm)
Weight (lb)	1,350 (613 kg)	2,500 (1134 kg)
Hyd. System Rated Pressure	2,500 psi	
Rated Torque	21,100 ft-lbs (28,607 Nm)	
Handle Length	36" (91.4 cm)	



Starr Power Tongs, LLC.
 2801 Youngsville Hwy
 Youngsville, LA 70592
 United States of America
 Phone: +1-337-330-2631