




5-1/2" VEKTOR SPECIFICATIONS

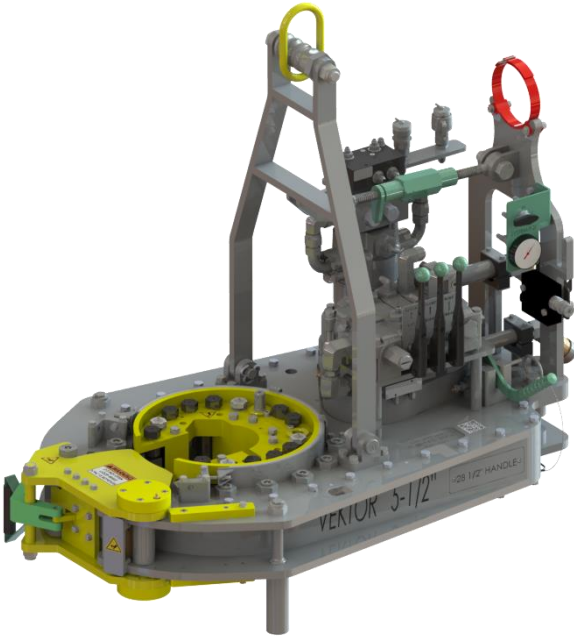

TYPICAL TESTED PERFORMANCE TORQUE (44VT.22.03.33.01)

Pressure	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb
1000	9080	4520	1760	880
2000	18160	9040	3520	1760
2250	20430	10170	3960	1980
2500	22700	11300	4400	2200

TYPICAL TESTED PERFORMANCE RPM (44VT.22.03.33.01)

GPM	Speed 1	Speed 2	Speed 3	Speed 4
10	2	4	9	18
20	4	8	21	42
40	9	18	45	91
60	14	27	70	139

*Disclaimer: Technical Values are +/- 5% of Listed Values
 Speed 1 = Low (Hydraulic) / Low (Mechanical)
 Speed 2 = High / Low
 Speed 3 = Low / High
 Speed 4 = High / High*

5-1/2" VEKTOR Tong	Stand Alone	With Backup
Capacity	2-3/8" - 5-1/2" (Tong)	2-3/8" - 6-1/4" (Backup)
Width	31.0" (78.7 cm)	35" (88.9 cm)
Length	51.5" (130.8 cm)	58.5" (148.6 cm)
Height	48.5" (123.2 cm)	79" (200.7 cm)
Weight (lb)	1530 (694 kg)	2900 lbs (1315 kg)
Hyd. System Rated Pressure	2500 psi	
Rated Torque	22,000 ft-lbs (29828 Nm)	
Handle Length	28.5" (Tong)	33.5" (Backup)



Starr Power Tongs, LLC.
 2801 Youngsville Hwy
 Youngsville, LA 70592
 United States of America
 Phone: +1-337-330-2631