



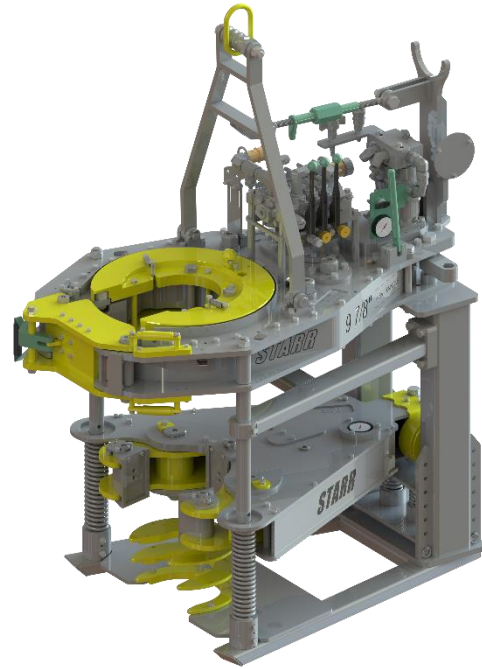

9-7/8" 40K SPECIFICATIONS

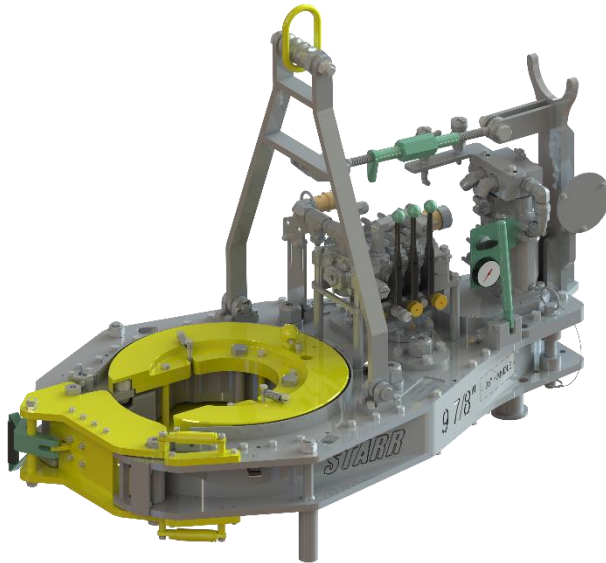

TYPICAL TESTED PERFORMANCE TORQUE (79.45.03.33.XX)					TYPICAL TESTED PERFORMANCE RPM (79.45.03.33.XX)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb	10	1	2	7	14
1000	17900	8900	3100	1500	20	2	4	14	28
2000	35900	17900	6300	3100	40	4	9	28	56
2250	40400	20200	7100	3500	60	7	14	42	84
2500	44900	22400	7900	3900	<p><i>Disclaimer: Technical Values are +/- 5% of Listed Values</i> <i>Speed 1 = Low (Hydraulic) / Low (Mechanical)</i> <i>Speed 2 = High / Low</i> <i>Speed 3 = Low / High</i> <i>Speed 4 = High / High</i></p>				

9-7/8" 40K Tong	Stand Alone	With Backup
Capacity	4-1/2" - 9-7/8" (Tong)	3-1/2" - 10-3/4" (Backup)
Width	37" (94 cm)	40.8" (103.6 cm)
Length	61.3" (155.7 cm)	62.5" (158.8 cm)
Height	47.5" (120.6 cm)	78.9" (200.4 cm)
Weight (lb)	2150 (977 kg)	3,500 (1588 kg)
Hyd. System Rated Pressure	2500 psi	
Rated Torque	40,000 ft-lbs (54232 Nm)	
Handle Length	36" (91.4 cm)	



Starr Power Tongs, LLC.
 2801 Youngsville Hwy
 Youngsville, LA 70592
 United States of America
 Phone: +1-337-330-2631