



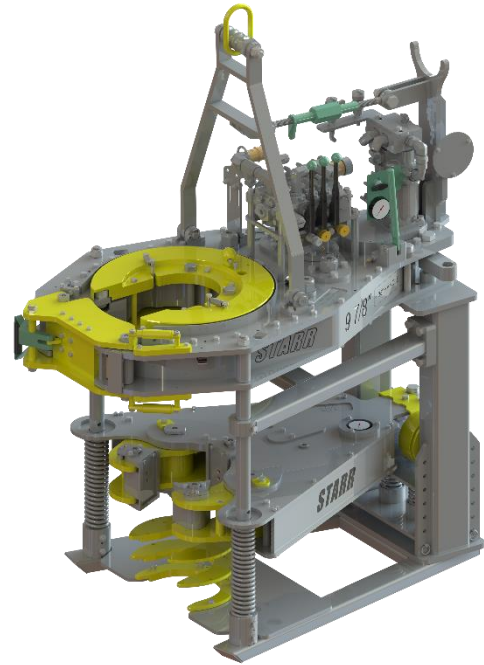

9-7/8" 60K SPECIFICATIONS

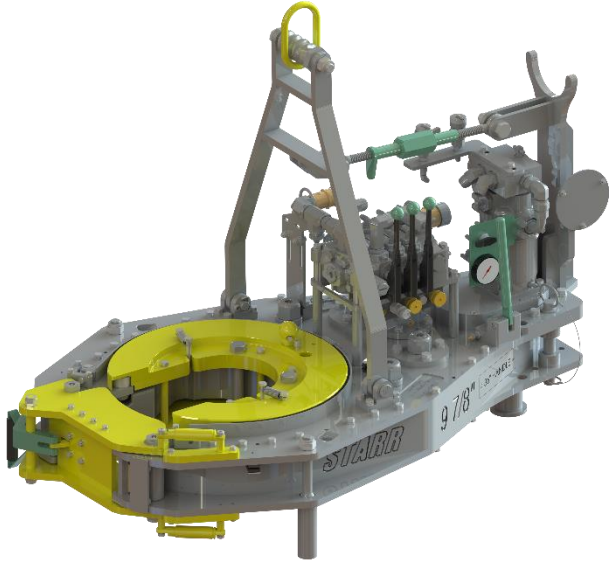

TYPICAL TESTED PERFORMANCE TORQUE (79.60.06.33.XX)					TYPICAL TESTED PERFORMANCE RPM (79.60.06.33.XX)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb					
1000	25400	12700	4400	2200	10	<1	1	4	9
2000	50800	25400	8900	4400	20	1	3	9	18
2250	57100	28500	10000	5000	40	3	6	18	36
2500	63500	31700	11200	5600	60	4	9	27	55

*Disclaimer: Technical Values are +/- 5% of Listed Values
 Speed 1 = Low (Hydraulic) / Low (Mechanical)
 Speed 2 = High / Low
 Speed 3 = Low / High
 Speed 4 = High / High*

9-7/8" 60K Tong	Stand Alone	With Backup
Capacity	4-1/2" - 9-7/8" (Tong)	3-1/2" - 10-3/4" (Backup)
Width	37" (94 cm)	40.8" (103.6 cm)
Length	61.3" (155.7 cm)	62.5" (158.8 cm)
Height	47.5" (120.6 cm)	78.9" (200.4 cm)
Weight (lb)	2150 (977 kg)	3,500 (1588 kg)
Hyd. System Rated Pressure	2500 psi	
Rated Torque	60,000 ft-lbs (54232 Nm)	
Handle Length	36" (91.4 cm)	



Starr Power Tongs, LLC.
 2801 Youngsville Hwy
 Youngsville, LA 70592
 United States of America
 Phone: +1-337-330-2631