




8595-SMF SPECIFICATIONS

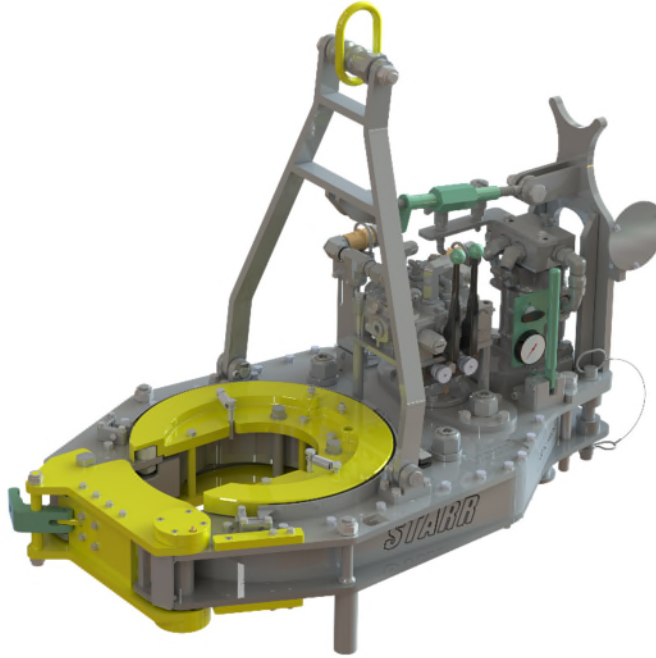

TYPICAL TESTED PERFORMANCE TORQUE (77S.35.03.32.01)					TYPICAL TESTED PERFORMANCE RPM (77S.35.03.32.01)				
Pressure	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb	ft-lb	ft-lb	ft-lb					
1000	12900	6400	2500	1200	10	1	3	8	17
2000	25800	12900	5100	2500	20	3	6	17	34
2250	29000	14500	5800	2900	40	6	13	34	68
2500	32200	16100	6400	3200	60	10	20	51	102

*Disclaimer: Technical Values are +/- 5% of Listed Values
 Speed 1 = Low (Hydraulic) / Low (Mechanical)
 Speed 2 = High / Low
 Speed 3 = Low / High
 Speed 4 = High / High*

8595-SMF Tong	Stand Alone	With Backup
Capacity	4-1/2" - 9-5/8" (Tong)	N/A
Width	32.5" (82.55 cm)	N/A
Length	55.4" (140.7 cm)	N/A
Height	47.3" (120.1 cm)	N/A
Weight (lb)	1,560 (708 kg)	N/A
Hyd. System Rated Pressure	2500 psi	
Rated Torque	32,000 ft-lbs (43,386 Nm)	
Handle Length	32.5" (82.55 cm)	



Starr Power Tongs, LLC.
 2801 Youngsville Hwy
 Youngsville, LA 70592
 United States of America
 Phone: +1-337-330-2631