





STARR
POWER TONGS

14" - 50k SPECIFICATIONS 14" - 75k



TORQUE - Rineer 15IN ³ 50K Tong					TORQUE - Rineer 23IN ³ 75K Tong				
Press. PSI	Speed 1 ft-lb.	Speed 2 ft-lb.	Speed 3 ft-lb.	Speed 4 ft-lb.	Press. PSI	Speed 1 ft-lb.	Speed 2 ft-lb.	Speed 3 ft-lb.	Speed 4 ft-lb.
1000	21,272	3,752	10,636	1,876	1000	30,504	5,380	15,252	2,690
2000	42,544	7,504	21,272	3,752	2000	61,008	10,761	30,504	5,380
2250	47,862	8,442	23,931	4,221	2250	68,634	12,106	34,317	6,053
2500	53,180	9,380	26,590	4,690	2500	76,260	13,451	38,130	6,726
2750	58,498	10,318	29,249	5,159	2750	83,886	14,796	41,943	7,398
3000	63,816	11,256	31,908	5,628	3000	91,512	14,141	45,756	8,071
RPM - Rineer 15IN ³ 50K Tong					RPM - Rineer 23IN ³ 75K Tong				
GPM	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
10	1	5.9	2.1	11.8	10	0.7	3.8	1.4	7.7
20	2.1	11.8	4.2	23.5	20	1.4	7.7	2.7	15.4
40	4.2	23.5	8.3	47.1	40	2.7	15.4	5.4	30.7
60	6.2	35.3	12.5	70.6	60	4.1	23	8.1	46.1
NOTE – 2 Options Available 14" 50 – (1 Handle – 2 Capped Valves) 14" 50-BR (Ready to Receive Backup)					NOTE – 2 Options Available 14" 75 – (1 Handle – 2 Capped Valves) 14" 75-BR (Ready to Receive Backup)				

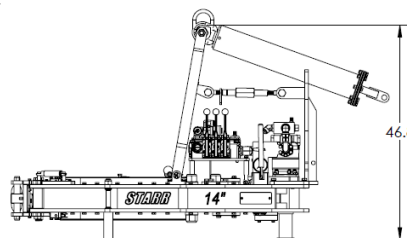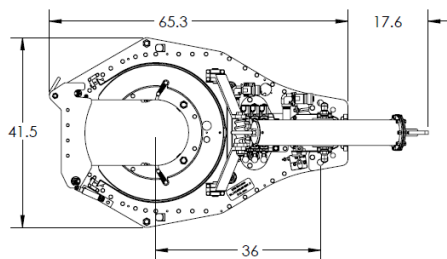

14" Tong	
Width	41.5" (105.4 cm)
Length	65.3" (165.9 cm)
Height	46.8" (118.9 cm)
Weight	2,350lb. (1068kg)
Rated Pressure	2500 psi
Rated Torque	75,000 ft-lbs.
Handle Length	36" (91.4 cm)

TONG JAWS AVAILABLE: 6-5/8" – 14"

(Other sizes available upon request)

Disclaimer: Technical Values are +/- 5% of Listed Values

	Motor Shift	Tong Transmission Shift
Speed 1	Low Gear	Low Gear
Speed 2	Low Gear	High Gear
Speed 3	High Gear	Low Gear
Speed 4	High Gear	High Gear