




**STARR**  
POWER TONGS


# 14" 75 SPECIFICATIONS

## 14" 75-BR


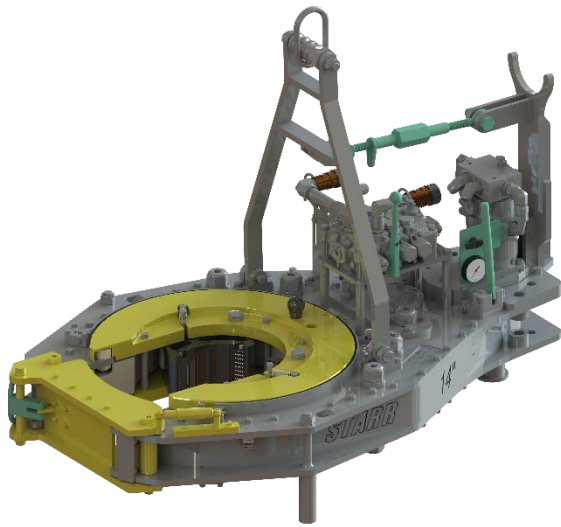


TORQUE - Rineer 23IN <sup>3</sup> 75K Tong					RPM - Rineer 23IN <sup>3</sup> 75K Tong				
Press.	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb.	ft-lb.	ft-lb.	ft-lb.					
2000	61,008	10,761	30,504	5,380	10	0.7	3.8	1.4	7.7
2250	68,634	12,106	34,317	6,053	20	1.4	7.7	2.7	15.4
2500	76,260	13,451	38,130	6,726	40	2.7	15.4	5.4	30.7
2750	83,886	14,796	41,943	7,398	60	4.1	23	8.1	46.1
3000	91,512	16,141	45,756	8,071					


**NOTE – 2 Options Available**  
**14" 75** – (1 Handle – 2 Capped Valves)  
**14" 75-BR** (Ready to Receive Backup)

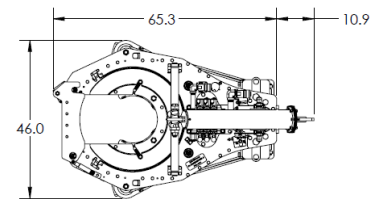

	Motor Shift	Tong Transmission Shift
<b>Speed 1</b>	Low Gear	Low Gear
<b>Speed 2</b>	Low Gear	High Gear
<b>Speed 3</b>	High Gear	Low Gear
<b>Speed 4</b>	High Gear	High Gear

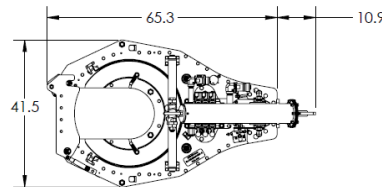

	14" Tong	w/ Backup
Capacity	6 5/8"-14"	5 1/2"-15"
Width	41.5" (105.4 cm)	46" (116.8 cm)
Length	65.3" (165.9 cm)	65.3" (165.9 cm)
Height	46.9" (119.1 cm)	80.1" (203.5 cm)
Weight	2,250lb. (1023kg)	4,050lb. (1,840kg)
Rated Pressure	2500 psi	
Rated Torque	75,000 ft-lbs.	
Handle Length	36" (91.4 cm)	

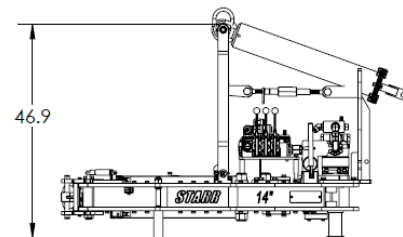

**TONG JAWS AVAILABLE: 6-5/8" – 14"**  
**BACKUP JAWS AVAILABLE: 5-1/2" – 15"**  
 (Other sizes available upon request)

Disclaimer: Technical Values are +/- 5% of Listed Values