



STARR 6-1/4" SPECIFICATIONS





POWER TONGS



TORQUE - Rineer 15IN ³ 30K Tong					RPM - Rineer 15IN ³ 30K Tong				
Press.	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb.	ft-lb.	ft-lb.	ft-lb.					
2000	24,108	4,252	12,054	2,126	10	1.6	8.8	3.1	17.7
2250	27,122	4,784	13,561	2,392	20	3.1	17.7	6.2	35.3
2500	30,135	5,315	15,068	2,658	40	6.2	35.3	12.5	70.6
2750	33,149	5,847	16,574	2,923	60	9.3	53	18.7	105.9
3000	36,162	6,378	18,081	3,189	NOTE – 2 Options Available 6 1/4" 30 – (1 Handle – 2 Capped Valves) 6 1/4" 30-BR (Ready to Receive Backup)				

	Motor Shift	Tong Transmission Shift
Speed 1	Low Gear	Low Gear
Speed 2	Low Gear	High Gear
Speed 3	High Gear	Low Gear
Speed 4	High Gear	High Gear

	6-1/4" Tong	w/ Backup
Capacity	2 3/8" - 6 1/4"	2 3/8" - 7"
Width	29.5" (75cm)	33.5" (85cm)
Length	55.6" (141.2cm)	55.9" (142cm)
Height	47.6" (121cm)	77.9" (197.9cm)
Weight (lb.)	1,675lb (761kg)	2,900lb (1318kg)
Rated Pressure	2,500 psi	
Rated Torque	30,000 ft-lb. (47,453 NM)	
Handle Length	32.5" (82.6 cm)	

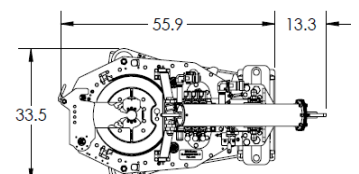

TONG JAWS AVAILABLE: 2 1/16" – 6 1/4"

BACKUP JAWS AVAILABLE: 2 3/8" – 7"

(Other sizes available upon request)

Disclaimer: Technical Values are +/- 5% of Listed Values