




STARR 13-5/8" SPECIFICATIONS

POWER TONGS




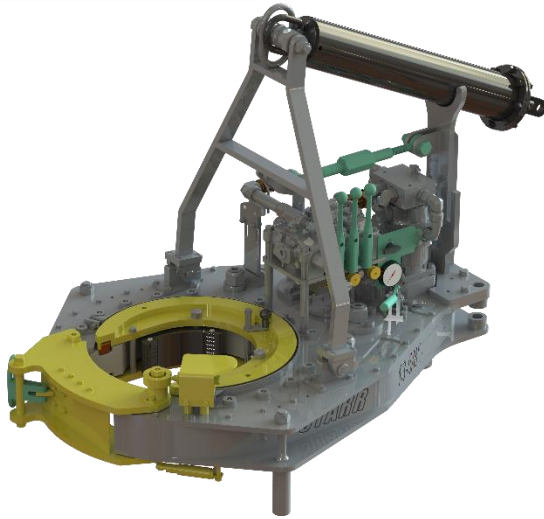


TORQUE - Rineer 15IN³

Press.	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb.	ft-lb.	ft-lb.	ft-lb.
2000	24,118	4,824	12,059	2,412
2250	27,133	5,427	13,566	2,713
2500	30,148	6,030	15,074	3,015
2750	33,162	6,632	16,581	3,316
3000	36,177	7,235	18,089	3,618

RPM 2-Speed 15IN³ Motor

GPM	Speed 1	Speed 2	Speed 3	Speed 4
10	1.6	8	3.2	16
20	3.2	16	6.4	32
40	6.4	32	12.8	64
60	9.6	48	19.2	96

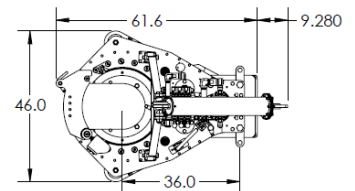

	13 5/8" Tong	13 5/8" Tong w/ Backup
Capacity	5 1/2" - 13 5/8"	5 1/2" - 14 5/8"
Width	43" (109.2 cm)	46" (116.8 cm)
Length	57.6" (146.3 cm)	61.6" (156.5 cm)
Height	47.5" (120.6 cm)	76.4" (190 cm)
Weight	1,675lb (761kg)	3,150lb (1,432kg)
Rated Pressure	3,000 psi	
Rated Torque	35,000 ft-lb. (47,453 nm)	
Handle Length	36" (91.4 cm)	

TONG JAWS AVAILABLE: 5 1/2" – 13 5/8"
BACKUP JAWS AVAILABLE: 5 1/2" – 14 5/8"

(Other sizes available upon request)

Disclaimer: Technical Values are +/- 5% of Listed Values